

6

5

4

3

2

1

DWG. NO.

MARK	DATE	REVISION	REASON	SIGNATURE

D


D

C

C

B

B

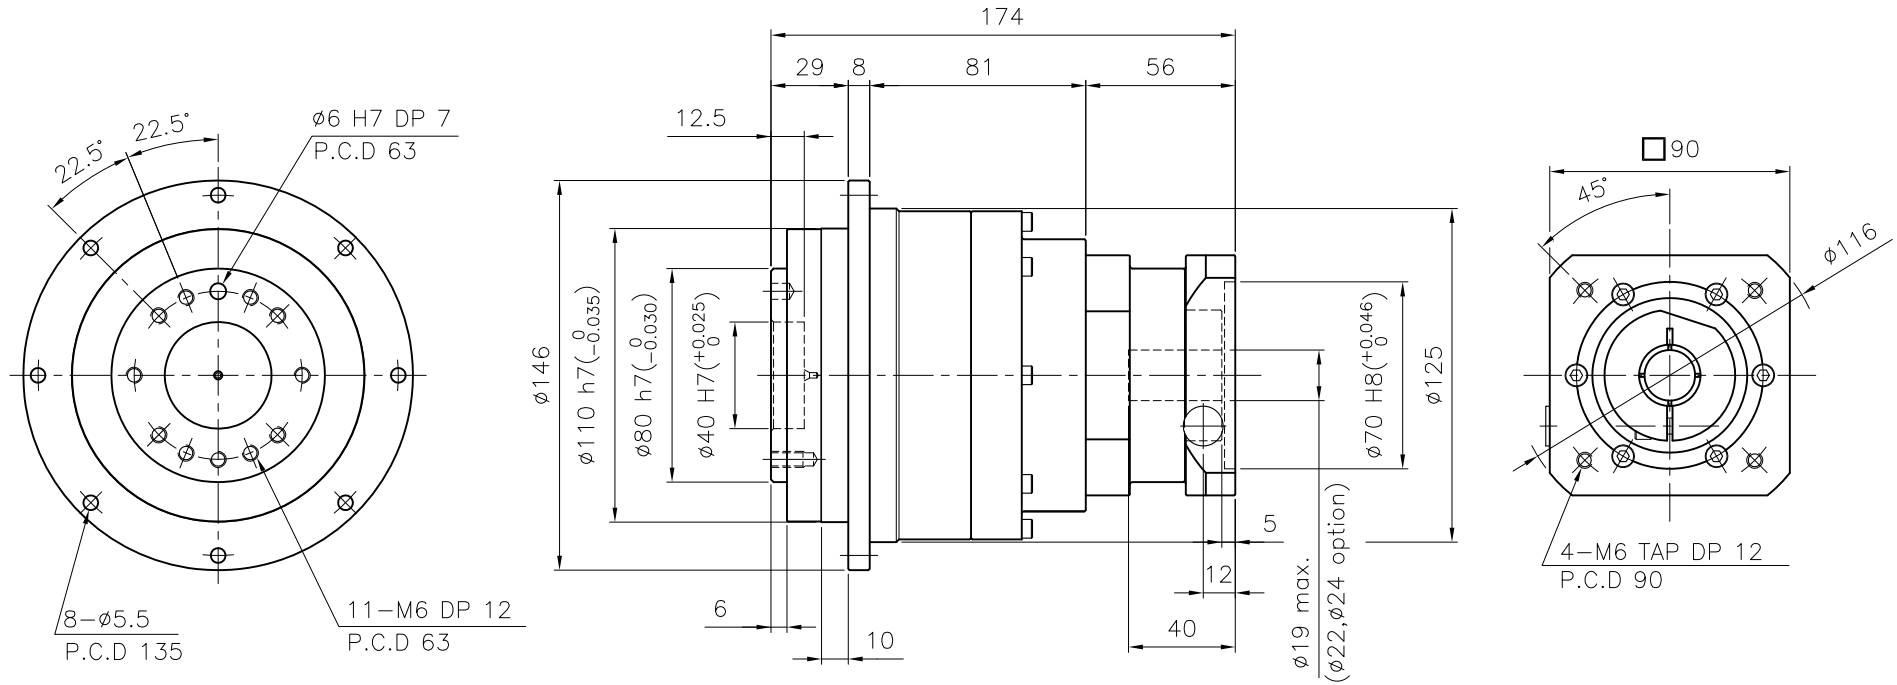

### SPECIFICATION

- Reducer Stage : 2
- Ratio : 1/20 , 1/25 , 1/35 , 1/40 , 1/50 , 1/70 , 1/100
- Backlash
  - Precision Backlash P1( $\leq 5$  arcmin)
  - Low Backlash P2( $\leq 7$  arcmin)
  - Standard Backlash P3( $\leq 10$  arcmin)
- Input Shaft Dia. :  $\phi 19$  max. ( $\phi 22, \phi 24$  option)  
In case that motor shaft Dia. is smaller than  $\phi 19$  or is  $\phi 22$  Option  
Bushing is supplied

A

A

GENERAL TOLERANCE (mm)	SURFACE ROUGHNESS	NF-110		$\phi 146 \times 174$		-		1		REMARKS	
0.5~3	±0.1	NO.	DESCRIPTIONS	SIZE	MAT'L	Q'TY	WEIGHT (kgf)				
3~6	±0.1	CUSTOMER	STANDARD	SCALE	1 / 2	PROJECTION					
6~30	±0.2	TITLE	NF-110(1/20~1/100)	DWG.NO.	NF11000A2-090B	REV. NO.					
30~120	±0.3	Precision Planetary Gearhead		REF.NO.							
120~400	±0.5	DRAWN	CHECKED	APPROVED							
400~1000	±0.8	S.R.JEON									
1000~2000	±1.2	2018.09.28									
2000~4000	±2										

**NARA DRIVE**

6

5

4

3

2

1