

6

5

4


3

2

1

DWG. NO.

MARK	DATE	REVISION	REASON	SIGNATURE

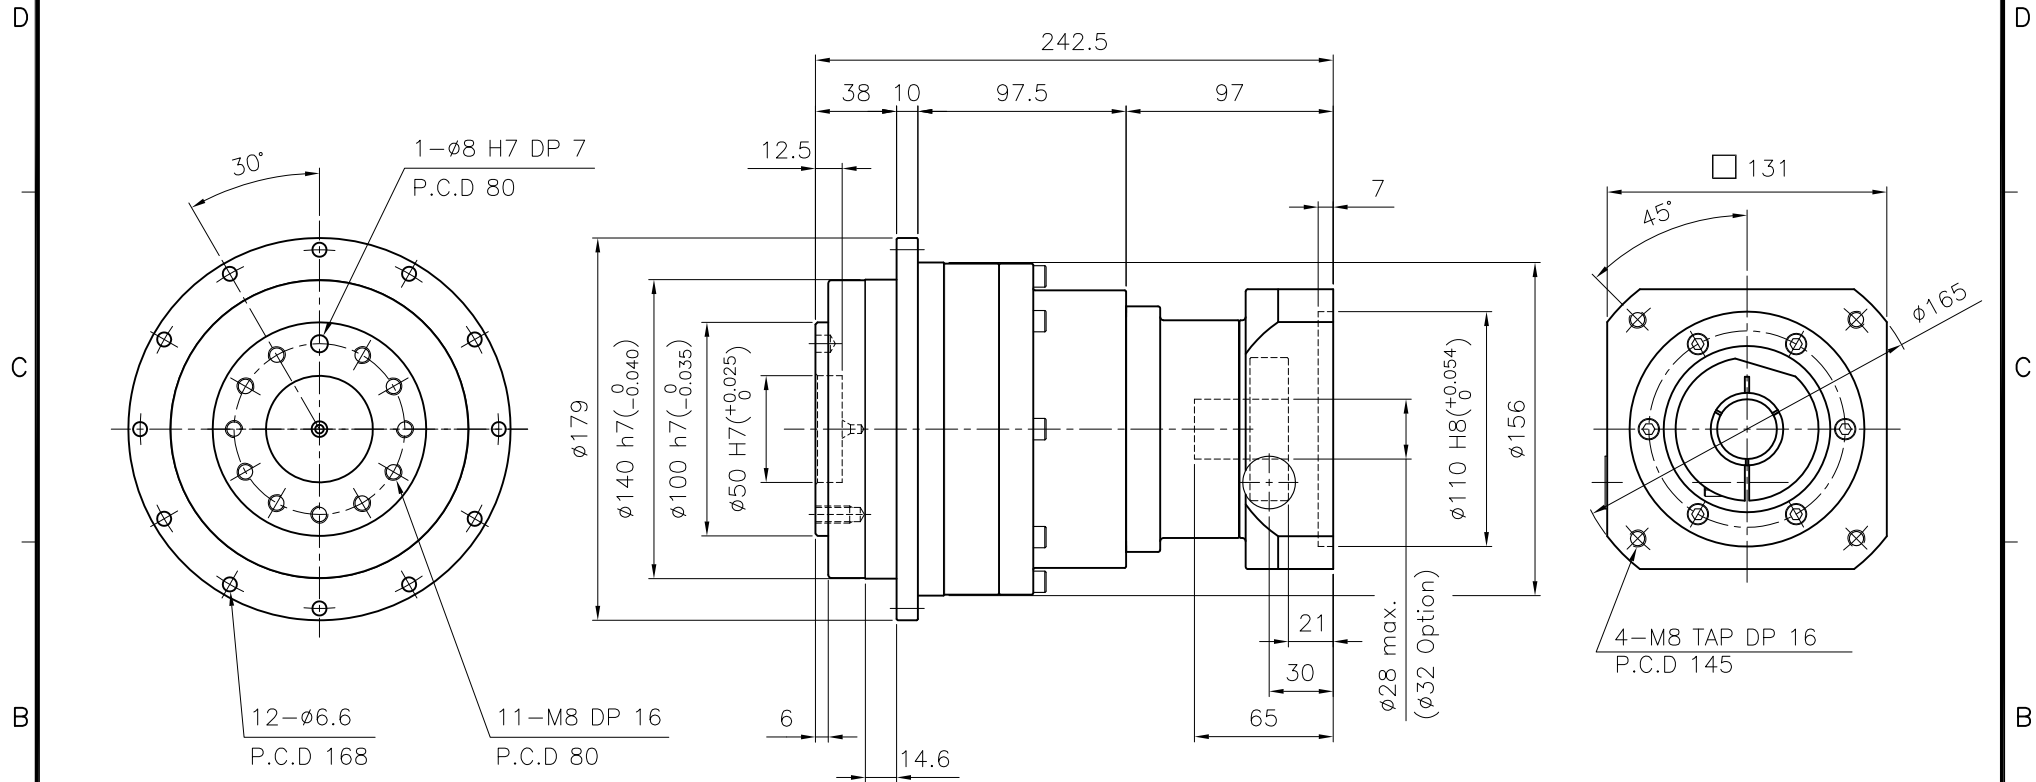

SPECIFICATION

- Reducer Stage : 2
- Ratio : 1/20 , 1/25 , 1/35 , 1/40 , 1/50 , 1/70 , 1/100
- Backlash
 - Precision Backlash P1(≤ 5 arcmin)
 - Low Backlash P2(≤ 7 arcmin)
 - Standard Backlash P3(≤ 10 arcmin)
- Input Shaft Dia. : $\phi 28$ max. ($\phi 32$ option)
In case that motor shaft Dia. is smaller than $\phi 28$
Bushing is supplied

GENERAL TOLERANCE (mm)	SURFACE ROUGHNESS	NF-140		$\phi 179 \times 242.5$		-		1		-	
0.5~3	± 0.1	Ra	Rmax	NO.	DESCRIPTIONS	SIZE	MAT'L	Q'TY	WEIGHT (kgf)	REMARKS	
3~6	± 0.1	$\sqrt{12.5}$	\sim	CUSTOMER	STANDARD	SCALE	1 / 2.5	PROJECTION			
6~30	± 0.2	$\sqrt{25}$	∇	TITLE	NF - 140(1/20~1/100)	DWG.NO.	NF14000A2-130A	REV. NO.	0		
30~120	± 0.3	$\sqrt{3.2}$	∇	Precision Planetary Gearhead		REF.NO.					
120~400	± 0.5	$\sqrt{12.5}$	∇	DRAWN	CHECKED	APPROVED					
400~1000	± 0.8	$\sqrt{6.3}$	∇	S.R.JEON							
1000~2000	± 1.2	$\sqrt{3.2}$	∇	2018.10.01							
2000~4000	± 2	$\sqrt{0.4}$	∇								

NARA DRIVE

6

5

4

3

2

1