

6

5

4


3

2

1

DWG. NO.

MARK	DATE	REVISION	REASON	SIGNATURE

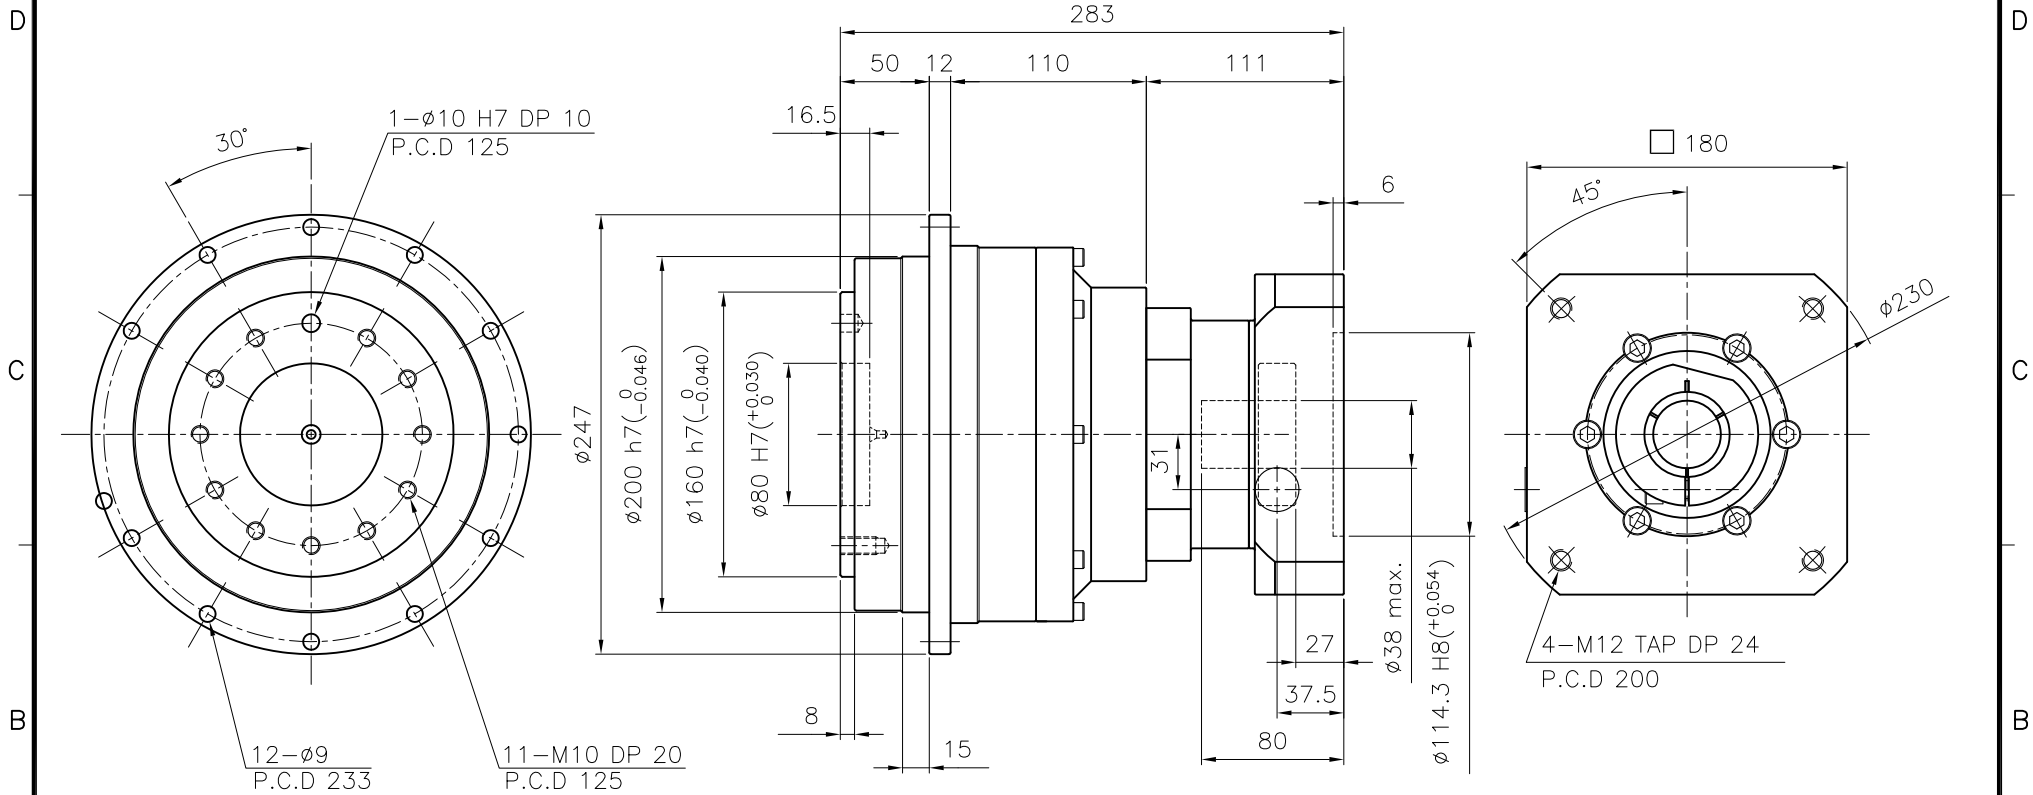

SPECIFICATION

- 1.Reducer Stage : 2
- 2.Ratio : 1/20 , 1/25 , 1/35 , 1/40 , 1/50 , 1/70 , 1/100
- 3.Backlash
 - 3-1) Precision Backlash P1(≤ 5 arcmin)
 - 3-2) Low Backlash P2(≤ 7 arcmin)
 - 3-3) Standard Backlash P3(≤ 10 arcmin)
- 4.Input Shaft Dia. : $\phi 38$ max.
In case that motor shaft Dia. is smaller than $\phi 38$
Bushing is supplied

GENERAL TOLERANCE (mm)	SURFACE ROUGHNESS	NF-200		$\phi 247 \times 230$		-	1			
0.5~3	Ra	Rmax	FINISH MARK	NO.	DESCRIPTIONS	SIZE	MAT'L	Q'TY	WEIGHT (kgf)	REMARKS
3~6	\checkmark	\sim	\sim	CUSTOMER	STANDARD	SCALE	1 / 3	PROJECTION		
6~30	\checkmark 100S	\checkmark 50S	\checkmark 25S	TITLE	NF-200(1/4~1/10)	DWG.NO.	NF20000A1-180A	REV. NO.	0	
30~120	\checkmark 12.5S	\checkmark 12.5S	\checkmark 6.3S	DRAWN	S.R.JEON	CHECKED		APPROVED		
120~400	\checkmark 6.3S	\checkmark 3.2S	\checkmark 1.6S	2018.10.02						
400~1000	\checkmark 3.2S	\checkmark 1.6S	\checkmark 0.8S	NARADrive						
1000~2000	\checkmark 1.6S	\checkmark 0.8S	\checkmark 0.4S							
2000~4000	\checkmark 0.8S	\checkmark 0.4S								

6

5

4

3

2

1