

6

5

4

3

2

1

DWG. NO.

MARK	DATE	REVISION	REASON	SIGNATURE

D

D

C


C

B

B

A

A

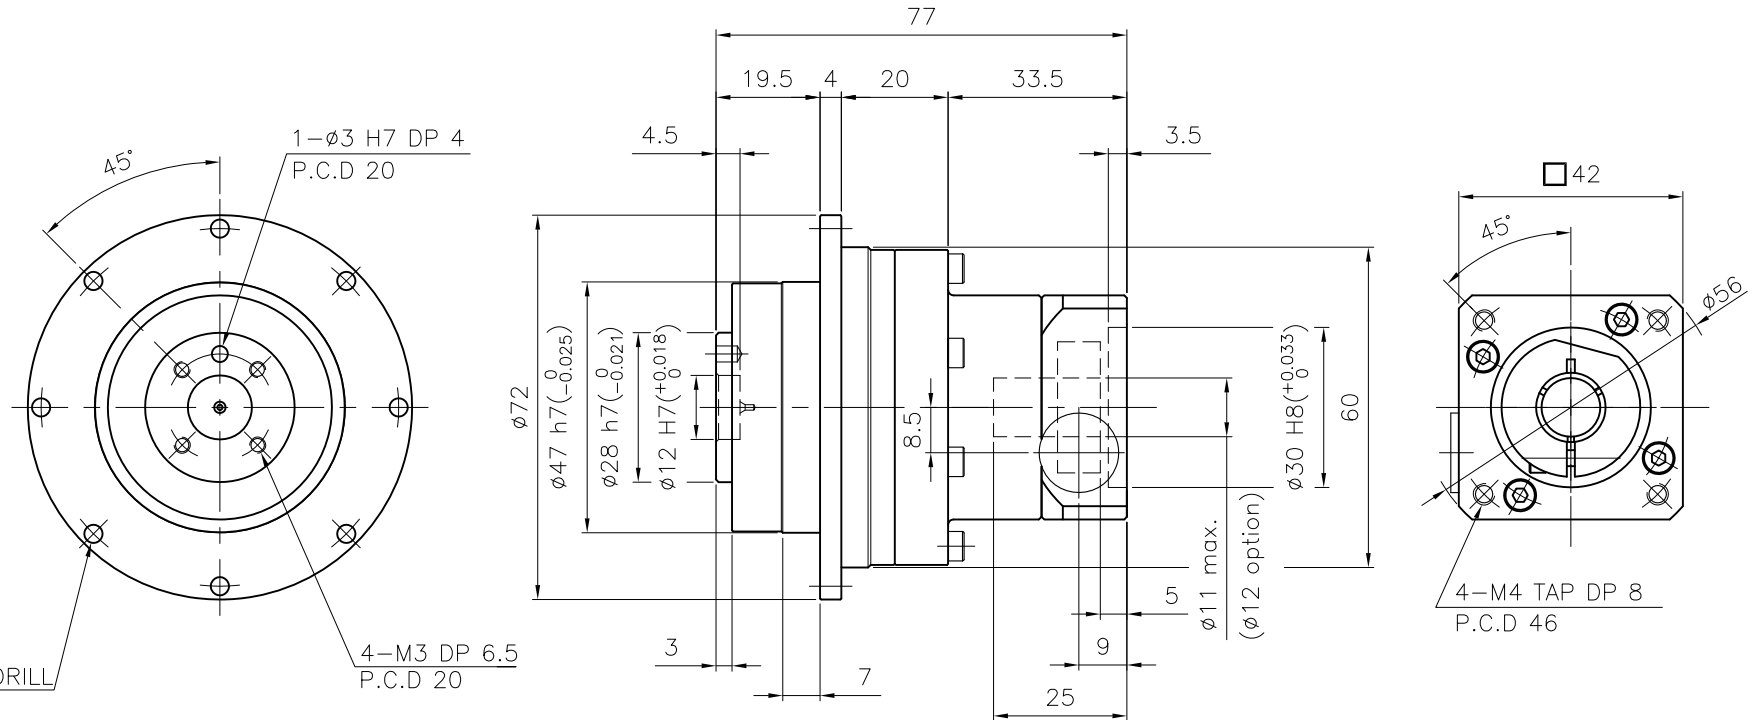

SPECIFICATION

- 1.Reducer Stage : 1
- 2.Ratio : 1/4 , 1/5 , 1/7 , 1/10
- 3.Backlash
 - 3-1) Precision Backlash P1(≤3 arcmin)
 - 3-2) Low Backlash P2(≤5 arcmin)
 - 3-3) Standard Backlash P3(≤8 arcmin)
- 4.Input Shaft Dia. : φ11 max. (φ12 option)
In case that motor shaft Dia. is smaller than φ11
Bushing is supplied

GENERAL TOLERANCE (mm)	SURFACE ROUGHNESS		FINISH MARK		NO.		NF-047		φ72x77		-		1		REMARKS	
0.5~3	±0.1	Ra	Rmax	~	CUSTOMER	STANDARD		SCALE	1 / 1	PROJECTION	1		WEIGHT (kgf)			
3~6	±0.1	100S	50S	▽	TITLE	NF-047(1/4~1/10)		DWG.NO.	NFO4700A1-042A		REV. NO.	0				
6~30	±0.2	12.5	25S	▽▽	DRAWN	S.R.JEON		CHECKED			APPROVED					
30~120	±0.3	6.3	12.5S	▽▽▽	2018.09.20											
120~400	±0.5	1.6	6.3S	▽▽▽▽												
400~1000	±0.8	0.8	3.2S	▽▽▽▽▽												
1000~2000	±1.2	0.2	0.8S	▽▽▽▽▽▽												
2000~4000	±2	0.1	0.4S	▽▽▽▽▽▽▽												

NARA DRIVE

6

5

4

3

2

1