

6

5

4

3

2

1

DWG. NO.

MARK	DATE	REVISION	REASON	SIGNATURE

D


D

C

C

B

B

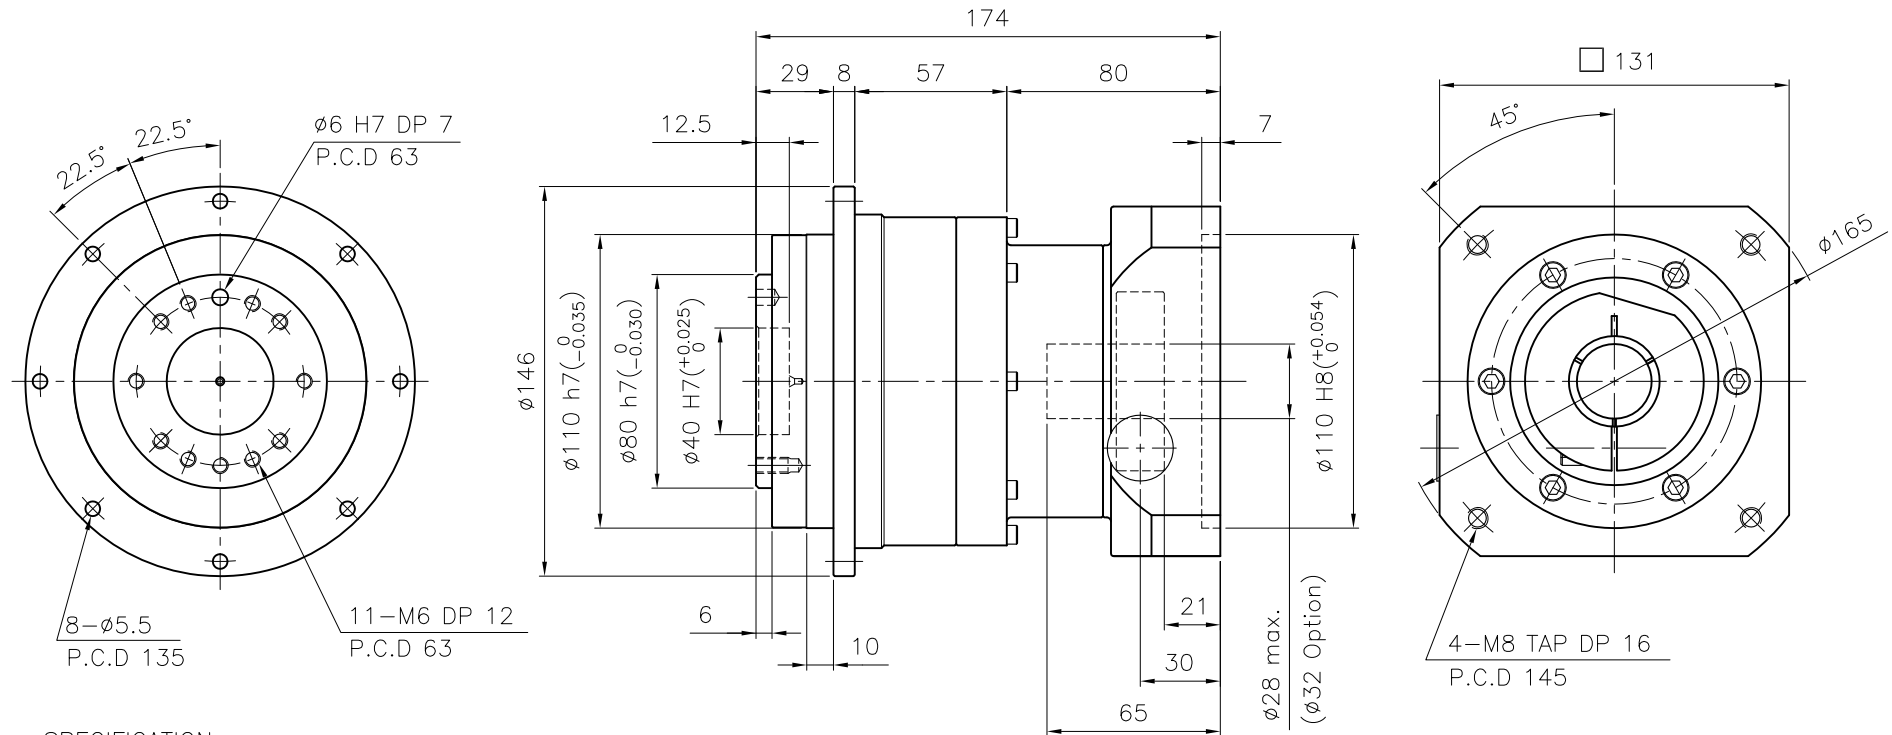

SPECIFICATION

- 1.Reducer Stage : 1
- 2.Ratio : 1/4 , 1/5 , 1/7 , 1/10
- 3.Backlash
 - 3-1) Precision Backlash P1(≤ 3 arcmin)
 - 3-2) Low Backlash P2(≤ 5 arcmin)
 - 3-3) Standard Backlash P3(≤ 8 arcmin)
- 4.Input Shaft Dia. : $\phi 28$ max. ($\phi 32$ option)
In case that motor shaft Dia. is smaller than $\phi 28$
Bushing is supplied

A

A

6

5

4

3

2

1

GENERAL TOLERANCE (mm)	SURFACE ROUGHNESS	FINISH MARK	NF-110		$\phi 146 \times 174$		-		1		-	
0.5~3	± 0.1	Ra	NO.	DESCRIPTIONS	SIZE	MAT'L	Q'TY	WEIGHT (kgf)	REMARKS			
3~6	± 0.1	Rmax	CUSTOMER	STANDARD		SCALE	1 / 2	PROJECTION				
6~30	± 0.2	100S	TITLE	NF-110(1/4~1/10)		DWG.NO.	NF11000A1-130A		REV. NO.	0		
30~120	± 0.3	12S	DRAWN		CHECKED	APPROVED						
120~400	± 0.5	12.5S	S.R.JEON		2018.09.28							
400~1000	± 0.8	1.6										
1000~2000	± 1.2	0.8										
2000~4000	± 2	0.4S										